

## STANDARD EQUIPMENT

ISO Standard cabin
All-weather steel cab with 360° visibility
Safety glass windows
Rise-up type windshield wiper
Sliding fold-in front window
Sliding side window(LH)
Lockable door
Hot & cool box
Storage compartment & Ashtray
Transparent cabin roof-cover
CD/MP3 Player
Handsfree mobile phone system with USB
Sun visor
Computer aided power optimization (New CAPO) system
3-power mode, 2-work mode, user mode
Auto deceleration & one-touch deceleration system
Auto warm-up system
Auto overheat prevention system
Automatic climate control
Air conditioner & heater
Defroster
Self-diagnostics system
Starting Aid (air grid heater) for cold weather
Centralized monitoring
LCD display
Engine speed or Trip meter/Accel.
Clock
Gauges
Fuel level gauge
Engine coolant temperature gauge
Hyd. oil temperature gauge
Warnings
Check Engine
Overload
Communication error
Low battery
Air cleaner clogging
Indicators
Max power
Low speed/High speed
Fuel warmer
Auto idle
Door and cab locks, one key
Two outside rearview mirrors
Fully adjustable suspension seat with seat belt
Pilot-operated slidable joystick
Console box height adjust system
Two front working lights
Electric horn
Batteries (2 x 12V x 100 AH)
Battery master switch
Removable clean-out screen for cooler
Automatic swing brake
Removable reservoir tank
Fuel pre-filter with fuel warmer
Boom holding system
Arm holding system
Counterweight (3,400kg, 7,500lb)
Accumulator for lowering work equipment
Electric Transducers
Lower frame under cover (Normal)
Viscous fan clutch
Tires-dual (10.00-20-16PR)
Travel alarm

PLEASE CONTACT

www.hyundai-ce.com

2010. 06 Rev. 0

## OPTIONAL EQUIPMENT

Fuel filler pump (50 L/min)
Beacon lamp
Safety lock valve for boom cylinder with overload warning device
Safety lock valve for arm cylinder
Single-acting piping kit (breaker, etc.)
Double-acting piping kit (clamshell, etc.)
Quick coupler
12 volt power outlet (24V DC to 12V DC converter)
Various optional Arms
Super short arm (2.0 m, 6' 7")
Short arm (2.4 m, 7' 10")
Climate control
Air conditioner only
Heater only
Cabin FOPS/FOG (ISO/DIS 10262)
FOPS (Falling Object Protective Structure)
FOG (Falling Object Guard)
Cabin roof-steel cover
Cabin front guard-wire net
Cabin lights
Cabin front window rain guard
Undercarriage
Front and rear outrigger
Front and rear outrigger (Independent)
Front blade and rear outrigger
Lower frame under cover (Additional)
Tool kit
Operator suit
Rearview camera
Seat
Adjustable air suspension seat
Adjustable air suspension seat with heater
Mechanical suspension seat with heater
Tires - dual (10.00 - 20 solid)
Fenders (Mudguards)
Pattern change valve (2 patterns)
Hi-mate (Remote Management System)
Travel pedal (2 way)

- \* Standard and optional equipment may vary. Contact your Hyundai dealer for more information. The machine may vary according to International standards.
- \* The photos may include attachments and optional equipment that are not available in your area.
- \* Materials and specifications are subject to change without advance notice.
- \* All imperial measurements rounded off to the nearest pound or inch.

## **HYUNDAI** HEAVY INDUSTRIES CO.,LTD. **CONSTRUCTION EQUIPMENT**

Head Office (Sales Office)  
1 JEONHA-DONG, DONG-GU, ULSAN, KOREA TEL: (82) 52-202-7970, 7729, 0971 FAX: (82) 52-202-7979, 7720

Americas Operation: Hyundai Construction Equipment Americas, Inc.  
955 ESTES AVENUE, ELK GROVE VILLAGE, IL. 60007, U.S.A. TEL: (1) 847-437-3333 FAX: (1) 847-437-3574

Europe Operation: Hyundai Heavy Industries Europe N.V.  
VOSSENDAAL 11, 2440 GEEL, BELGIUM TEL: (32) 14-56-2200 FAX: (32) 14-59-3405

India Operation: Hyundai Construction Equipment India Pvt., Ltd.  
PLOT NO.A-2, CHAKAN INDUSTRIAL AREA, VILL.- KHALUMBRE. TALUK.- KHED., DIST.- PUNE 410 501, INDIA  
TEL: (91) 21-3530-1700 FAX: (91) 21-3530-1712

We build a better future

# Robex 210W-9

With Tier 3 Engine installed



\*Photo may include optional equipment.

 **HYUNDAI**  
HEAVY INDUSTRIES CO.,LTD.



# Pride at Work

Hyundai Heavy Industries strives to build state-of-the-art earthmoving equipment to give every operator maximum performance, more precision, versatile machine preferences, and proven quality. Take pride in your work with Hyundai!



\*Photo may include optional equipment.

## Robex 210w-9

### Machine Walk-Around

#### Carrier

Heavy duty carrier frame with two speed powershift transmission.  
Heavy duty drive line and axles.  
Front axle oscillation +/- 7 degrees with ram lock.  
Wet disc brake (front & rear).  
Automatic parking brake - spring applied, hydraulically released.

#### Engine Technology

Proven and reliable, fuel efficient Cummins Tier III QSB6.7 engine.  
Electronically controlled for optimum fuel-to-air ratio and clean, efficient combustion.  
Low noise / Auto engine overheat feature / Anti-restart feature.

#### Hydraulic System Improvements

New patented hydraulic control system for improved controllability / Improved control valve design for added efficiency and smoother operation / New auto boom and swing priority system for optimum speed / New auto power boost feature for additional power when needed / Improved arm-in flow regeneration system for added speed and efficiency.

#### Pump Compartment

Industry-leading, powerful, reliable Kawasaki designed, variable volume in-line axial piston pumps.  
New compact solenoid block equipped with 3 solenoid valves, 2 EPPR valves, 1 check valve accumulator and pilot filter - controls 2 speed travel, power boost, boom priority, safety lock, arm-in regeneration control, swing logic valve control.  
Remotely mounted fuel, engine oil and case drain filters for maximum convenience while servicing.

#### Improved Steering Column

Slim-profile steering column capable of telescoping 60 mm and tilting 30 degrees.

#### Enhanced Operator Cab

##### Improved visibility

Enlarged cab with improved visibility / See-through upper skylight for visibility and ventilation.  
Larger right-side glass, now one piece, for better right visibility.  
Safety glass windows on all sides - less expensive than (polycarbonate) and won't scratch or fade.  
Closeable sunshade for operator convenience / Reduced front window seam for improved operator view.

##### Improved Cab Construction

New steel tube construction for added operator safety, protection and durability.  
New window open/close mechanism designed with cable and spring lift assist and single latch release.

##### Improved Suspension Seat / Console Assembly

Ergonomic joysticks with auxiliary control buttons for attachment use. Now with new sleek styling.  
Heated suspension (standard) or optional air ride suspension with heat.  
New joystick consoles - now adjustable in height by way of dial at bottom.  
Adjustable arm rests - turn dial to raise or lower for optimum comfort.

##### Advanced 7" Color Cluster

New color LCD display with easy-to-read digital gauges for hydraulic oil temperature, water temperature, and fuel. Simplified design makes adjustment and diagnostics easier. Also, new enhanced features such as rear-view camera are integrated into monitor.  
3 power modes : (P) Power, (S) Standard, (E) Economy, 2 work modes : Dig & Attachment, (U) User mode for operator preference.  
Enhanced self-diagnostic features with GPS download capability.  
One pump flow or two pump flow for optional attachment now selectable through the cluster.  
New anti-theft system with password capability.  
Boom speed and arm regeneration are selectable through the monitor.  
Auto power boost is now available - selectable (on/off) through the monitor.  
Powerful air conditioning and heat with auto climate control, 20% more heat and air output than 7A series!  
Hi-Mate (Remote Management System) works through GPS/Satellite technology to ultimately provide better customer service and support.



# Preference

Operating a 9 series is unique to every operator. Operators can fully customize their work environment and operating preferences to fit their individual needs.



## Operator Comfort

In a 9 series cabin you can easily adjust the seat, console and armrest settings to best suit your preferred comfort level. Seat and console position and height can be set together and independent from each other. Improved steering wheel telescope and tilt functions provide operators improved access. A fully automatic, high capacity airconditioning system maintains a constant preferred temperature. During cold weather conditions, the PTC cab heater provides immediate heat at startup for added operator comfort.



## Reduced Stress

Work is stressful enough. Your work environment should be stress free. Hyundai's 9 series provides improved cab amenities, additional space and a comfortable seat to minimize stress to the operator. A powerful climate control system provides the operator with optimum air temperature. An advanced audio system with CD player, AM/FM stereo and MP3 capabilities, plus remotely located controls is perfect for listening to music favorites. Operators can even talk on the phone with the hands-free cell phone feature.



## Operator - Friendly Cluster

The advanced new cluster with 7 inch wide color LCD screen and toggle switch allows the operator to select his personal machine preferences. Power and work mode selection, self diagnostics, rear-view camera, maintenance check lists, start-up machine security, and video functions were integrated into the cluster to make the machine more versatile and the operator more productive.



\*Photo may include optional equipment.



### Wide Cabin with Excellent Visibility

The newly designed cabin was conceived for more space, a wider field of view and operator comfort. Special attention was given to a clear, open and convenient interior with plenty of visibility on the machine surroundings and the job at hand. This well balanced combination of precision aspects put the operator in the perfect position to work safely and securely.



# Precision

Innovative hydraulic system technologies make the 9 series excavator fast, smooth and easy to control.



\*Photo may include optional equipment.

## Computer Aided Power

The engine horsepower and hydraulic horsepower work together in unison through the advanced CAPO(Computer Aided Power Optimization) system.

This system interfaces with multiple sensors placed throughout the hydraulic system, as well as the electronically controlled engine, to provide the optimum level of engine power and hydraulic flow for the job at hand.

Operators can set their own preferences for boom or swing priority, power mode selection and optional work tools at the touch of a button. The CAPO system also provides complete self diagnostic features and digital gauges for important information like hydraulic oil temperature, water temperature and fuel level.

### Power Mode

Three unique power modes provide the operator with custom power, speed and fuel economy. P (Power Max) mode maximizes machine speed and power for mass production.

S (Standard) mode provides a reduced, fixed rpm for optimum performance and improved fuel economy. For maximum fuel savings and improved control, E (Economy) mode provides precise flow and engine power based on load demand.

### Work Mode

The work mode allows the operator to select single flow attachments like a hydraulic breaker or bi-directional flow attachments like a crusher. Flow settings unique to each attachment can be programmed from within the cluster.

### User Mode

Some jobs require more precise machine settings. Using the versatile U (User) mode, the operator can customize engine speed, pump output, idle speed and other machine settings according to personal preferences.

## Improved Hydraulic System




To achieve optimum precision, Hyundai redesigned the hydraulic system to provide the operator with super fine touch and improved controllability. Improved pump flow control reduces flow when controls are not being used to minimize fuel consumption.

Improved spool valves in the control valve are engineered to provide more precise flow to each function with less effort.

Improved hydraulic valves, precision-designed variable volume piston pumps, fine-touch pilot controls, and enhanced travel functions make any operator running a 9

series look like a smooth operator. Newly improved features include arm-in and boom-down flow regeneration, improved control valve technology and innovative auto boom and swing priority for optimal performance in any application.

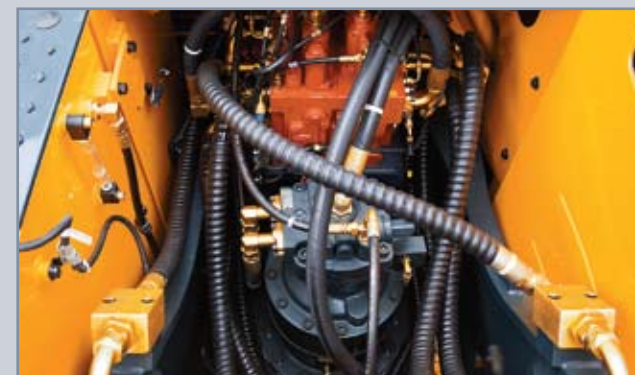

## Auto Boom-swing Priority

This smart function automatically and continuously looks for the ideal hydraulic flow balance for the boom and swing functions of the machine. The advanced CAPO system monitors the hydraulic system and adjusts its settings to maximize performance and productivity.



# Performance

9 series is designed for maximum performance to keep the operator working productively.




\*Photo may include optional equipment.



## Fully Independent Outrigger System

R210W-9 can be equipped with four independent outriggers (front and rear) or two independent outriggers and a dozer blade (front or rear). Each outrigger and the dozer blade are controlled by a switch and the dozer lever.

Each outrigger is equipped with cylinder guards for added protection.

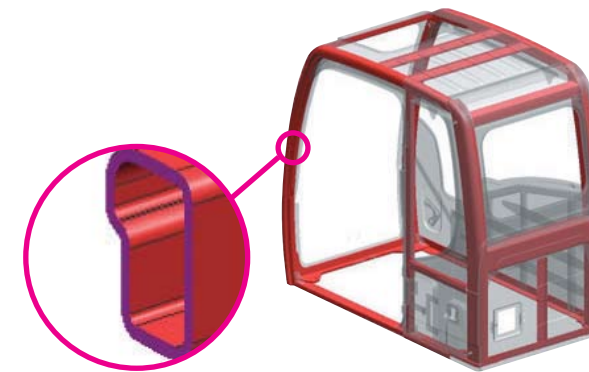

## New and Improved Travel System

Auto cruise control system reduces operator fatigue by maintaining a fixed speed when driving distances.

A new auto ram lock system is available to improve operating safety. A new creep speed travel system improves maneuverability and fine control.


A new optional forward / reverse travel pedal control allows operators to choose to use the travel pedal control while in work mode or lever control when in travel mode.



Auto cruise control system    Auto ram lock system    Creep speed travel system

## Structural Strength

The 9 series cabin structure has been fitted with stronger but slimmer tubing for more safety and better visibility. Low-stress and high strength steel was integrally welded to form a strong and stable lower frame. Structural durability was evaluated and tested by means of FEM (Finite Elements Method) analysis and long-term durability tests.

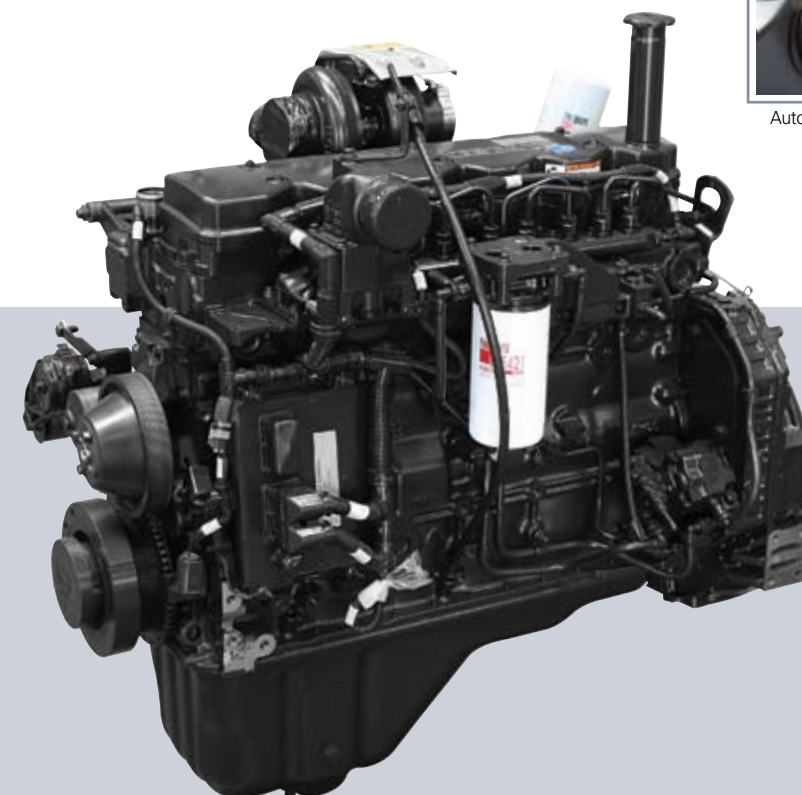

## CUMMINS QSB 6.7 Engine

The Tier III, six cylinder, 4 cycle, turbo-charged, charge air cooled, Cummins QSB 6.7 engine provides maximum power, reliability, optimum fuel economy, and reduced emissions.

Electronically controlled fuel injection and diagnostic capabilities add to the engine's efficiency and serviceability.



# Profitability

9 series is designed to maximize profitability through improved efficiencies, enhanced service features and longer life components.



\*Photo may include optional equipment.



## Fuel Efficient

9 series excavators are engineered to be extremely fuel efficient. New innovations like the variable speed fan clutch, overload prevention control, three-stage auto decel system, and the new economy mode, conserve fuel and reduce the impact on the environment.




## Hi-mate (Remote Management System)

Hi-mate, Hyundai's proprietary remote management system, provides operators and dealer service personnel access to vital service and diagnostic information on the machine from any computer with internet access. Users can pinpoint machine location using digital mapping and set machine work boundaries. Hi-mate saves time and money for the owner and dealer by promoting preventative maintenance and reducing the need for multiple service calls.



## Easy Access

Ground-line access to filters, lube fittings, fuses, machine computer components and wide open compartments makes service more convenient on the 9 series.

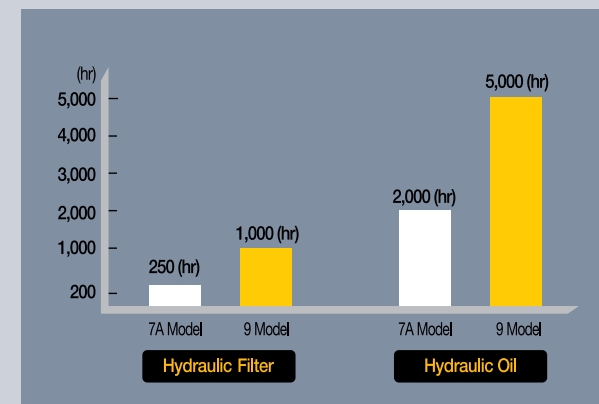

## Extended Life Components

9 series excavators were designed with bushings designed for extended lube intervals (250 hrs) & polymer shims (wear resistant, noise reducing), extended-life hydraulic filters (1,000hrs), long-life hydraulic oil (5,000hrs), more efficient cooling systems and integrated preheating systems which extend service intervals, minimize operating costs and reduce machine down time.



# Specifications

## ENGINE

MODEL		Cummins QSB 6.7	
Type		Water-cooled, 4-cycle diesel, 6-cylinder in-line, Direct injection, Turbocharged, Charge air cooled, Low emission	
Rated flywheel horsepower	SAE	J1995 (gross)	176 HP (131kW) at 1,900 rpm
		J1349 (net)	165 HP (123kW) at 1,900 rpm
horsepower	DIN	6271/1 (gross)	178 PS (131kW) at 1,900 rpm
		6271/1 (net)	167 PS (123kW) at 1,900 rpm
Max. torque		81.4 kgf-m(589 lbf-ft) at 1,400 rpm	
Bore X stroke		107 x 124 mm (4.2" x 4.9")	
Piston displacement		6,700 cc (409 in <sup>3</sup> )	
Batteries		2 x 12 V x 100 AH	
Starting motor		24V-4.5kW	
Alternator		24V-70Amp	

## HYDRAULIC SYSTEM

MAIN PUMP	
Type	Two variable displacement piston pumps
Rated flow	2 X 222 L /min (58.6 US gpm/48.8 UK gpm)
Sub-pump for pilot circuit	Gear pump

Cross-sensing and fuel saving pump system

HYDRAULIC MOTORS	
Travel	Two-speed axial pistons motor with brake valve
Swing	Axial piston motor with automatic brake

RELIEF VALVE SETTING	
Implement circuits	350 kgf/cm <sup>2</sup> (4,980 psi)
Travel	380 kgf/cm <sup>2</sup> (5,400 psi)
Power boost (boom, arm, bucket)	380 kgf/cm <sup>2</sup> (5,400 psi)
Swing circuit	265 kgf/cm <sup>2</sup> (3,770 psi)
Pilot circuit	40 kgf/cm <sup>2</sup> (570 psi)
Service valve	Installed

HYDRAULIC CYLINDERS	
No. of cylinder bore X stroke	Boom : 2-120 x 1,290 mm (4.7" x 50.8")
	Arm : 1-140 x 1,510 mm (5.5" x 59.4")
	Bucket : 1-125 x 1,055 mm (4.9" x 41.5")
	Blade : 2-120 x 226 mm (4.7" x 8.9")
	Outrigger : 2-130 x 427 mm (5.1" x 16.8")

## DRIVES & BRAKES

4-wheel hydrostatic drive. Constant mesh, helical gear transmission provides 2 forward and reverse travel speeds.

Max. drawbar pull		11,100 kgf (24,470 lbf)
Travel speed	1st	8.5 km/h (5.3 mph)
	2nd	35 km/h (21.7 mph)
Gradeability		31.5° (61 %)

Parking brake : Independent dual brake, front and rear axle full hydraulic power brake.

- Spring released and hydraulic applied wet type multiple disk brake.

- Transmission is locked at neutral position for parking, automatically.

## CONTROL

Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatigueless operation.

Pilot control	Two joysticks with one safety lever (LH): Swing and arm, (RH): Boom and bucket (ISO)
Engine throttle	Electric, Dial type
Lights	Two lights mounted on the boom, one under the battery box and one under the cabin

## AXLE & WHEEL

Full floating front axle is supported by center pin for ocillation. It can be locked by ocillation lock cylinders. Rear axle is fixed on the lower chassis.

Tires	10.00-20-16PR, Dual(tube type)
(optional)	10.00-20, Dual(solid type)

## SWING SYSTEM

Swing motor	Fixed displacement axial pistons motor
Swing reduction	Planetary gear reduction
Swing bearing lubrication	Grease-bathed
Swing brake(option)	Multi wet disc(pin lock type)
Swing speed	10.3 rpm

## STEERING SYSTEM

Hydraulically actuated, orbitrol type steering system actuates on front wheels through the steering cylinders.

Min. turning radius	6,690 mm(21' 11")
---------------------	-------------------

## COOLANT & LUBRICANT CAPACITY

Re-filling	liter	US gal	UK gal	
Fuel tank	310.0	81.9	68.2	
Engine coolant	35.0	9.2	7.7	
Engine oil	24	6.3	5.3	
Swing device - gear oil	5	1.3	1.1	
Axle	Front	14.6	3.9	3.2
	Rear	18.1	4.8	4.0
Hydraulic system (including tank)	340.0	89.8	74.8	
Hydraulic tank	165.0	43.6	36.3	

## UNDERCARRIAGE

Reinforced box-section frame is all-welded, low-stress.

Dozer blade and outriggers are available. A pin-on design.

Dozer blade	A very useful addition for leveling and back filling or clean-up work.
Outrigger	Indicated for max. operation stability when digging and lifting. Can be mounted on the front/or the rear.

## OPERATING WEIGHT (APPROXIMATE)


Operating weight, including 5,650mm (18' 6") boom, 2,920mm (9' 7") arm, SAE heaped 0.80m<sup>3</sup> (1.05yd<sup>3</sup>) backhoe bucket, lubricant, coolant, full fuel tank, hydraulic tank and the standard equipment.

MAJOR COMPONENT WEIGHT	
Upperstructure	8,950kg (19,730 lb)
Counterweight	3,400kg (7,500 lb)
Mono boom(with arm cylinder)	1,790kg (3,950 lb)

OPERATING WEIGHT	
Front outrigger and rear blade	20,500kg (45,200 lb)
Front and rear outrigger	20,600kg (45,400 lb)
Front blade and rear outrigger	20,900kg (46,100 lb)

## BUCKETS

All buckets are welded with high-strength steel.

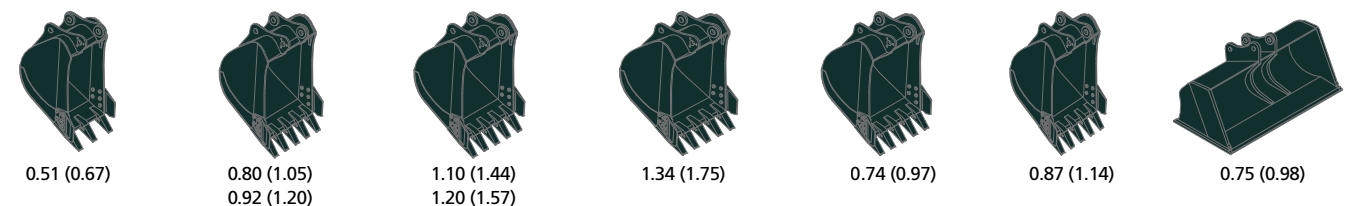

SAE heaped m<sup>3</sup> (yd<sup>3</sup>)

Capacity m <sup>3</sup> (yd <sup>3</sup> )		Width mm (in)		Weight kg (lb)	Recommendation m (ft-in)		
SAE heaped	CECE heaped	Without sidecutters	With sidecutters		5,650 (18' 6") Boom		
				2,000 (6' 7") Arm		2,400 (7' 10") Arm	2,920 (9' 7") Arm
0.51 (0.67)	0.45(0.59)	700(27.6)	820(32.3)	570(1,260)	●	●	●
0.80 (1.05)	0.70(0.92)	1,000(39.4)	1,120(44.1)	700(1,540)	●	●	●
0.87 (1.14)	0.75(0.98)	1,090(42.9)	1,210(47.6)	740(1,630)	●	●	■
0.92 (1.20)	0.80(1.05)	1,150(45.3)	1,270(50.0)	770(1,700)	●	●	■
1.10 (1.44)	0.96(1.26)	1,320(52.0)	1,440(56.7)	830(1,830)	■	▲	▲
1.20 (1.57)	1.00(1.31)	1,400(55.1)	1,520(59.8)	850(1,870)	■	▲	—
1.34 (1.75)	1.15(1.50)	1,550(61.0)	1,670(65.7)	920(2,030)	▲	▲	—
◆ 0.74 (0.97)	0.65(0.85)	985(38.8)	-	770(1,700)	●	●	●
◆ 0.90 (1.18)	0.80(1.05)	1,070(42.1)	-	810(1,790)	●	●	■
◆ 1.05 (1.37)	0.92(1.20)	1,290(50.8)	-	890(1,960)	■	▲	—
◎ 0.87 (1.14)	0.75(0.98)	1,140(44.9)	-	900(1,980)	●	●	■
■ 0.75 (0.98)	0.65(0.85)	1,790(70.5)	-	880(1,940)	●	●	■

◆ Heavy duty bucket    ◎ Rock-heavy duty bucket

■ Slope finishing bucket

● : Applicable for materials with density of 2,000 kg /m<sup>3</sup> (3,370 lb/ yd<sup>3</sup>) or less

■ : Applicable for materials with density of 1,600 kg /m<sup>3</sup> (2,700 lb/ yd<sup>3</sup>) or less

▲ : Applicable for materials with density of 1,100 kg /m<sup>3</sup> (1,850 lb/ yd<sup>3</sup>) or less

## ATTACHMENT

Booms and arms are welded with a low-stress, full-box section design. 5.65m (18' 6") boom and 2,0m (6' 7"), 2.4m (7' 10"), 2.92m (9' 7") arms.

## DIGGING FORCE

Boom	Length	mm (ft-in)	5,650 (18' 6")			Remarks
	Weight	kg (lb)	1,790 (3,950)			
Arm	Length	mm (ft-in)	2,000 (6' 7")	2,400 (7' 10")	2,920 (9' 7")	[ ]: Power Boost
	Weight	kg (lb)	975 (2,150)	1,045 (2,300)	1,095 (2,410)	
Bucket digging force	SAE	kN	130.4 [141.6]	130.4 [141.6]	130.4 [141.6]	
		kgf	13,300 [14,440]	13,300 [14,440]	13,300 [14,440]	
		lbf	29,320 [31,830]	29,320 [31,830]	29,320 [31,830]	
	ISO	kN	149.1 [161.8]	149.1 [161.8]	149.1 [161.8]	
		kgf	15,200 [16,500]	15,200 [16,500]	15,200 [16,500]	
		lbf	33,510 [36,380]	33,510 [36,380]	33,510 [36,380]	
Arm crowd force	SAE	kN	144.2 [156.5]	119.6 [129.9]	102.0 [110.7]	
		kgf	14,700 [15,960]	12,200 [13,250]	10,400 [11,290]	
		lbf	32,410 [35,190]	26,900 [29,210]	22,930 [24,900]	
	ISO	kN	151.0 [164.0]	125.5 [136.3]	106.9 [116.1]	
		kgf	15,400 [16,720]	12,800 [13,900]	10,900 [11,830]	
		lbf	33,950 [36,860]	28,220 [30,640]	24,030 [26,090]	

Note: Boom weight includes arm cylinder, piping, and pin

Arm weight includes bucket cylinder, linkage, and pin





# Lifting Capacity

## R210W-9

Rating over-front Rating over-side or 360 degree

Boom : 5.65 m (18' 6") / Arm : 2.92 m (9' 7") / Bucket : 0.80 m<sup>3</sup> (1.05 yd<sup>3</sup>) SAE heaped / 4 outrigger down with 3,400 kg (7,500 lb) counterweight.

Load point height m (ft)	Load radius										At max. reach			
	1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity		Reach	
													m (ft)	
9.0 m (30 ft)	kg											*3410	*3410	6.52
	lb											*7520	*7520	(21.4)
7.5 m (25 ft)	kg											*3470	*3470	7.96
	lb											*7650	*7650	(26.1)
6.0 m (20 ft)	kg								*2690	*2690	*3580	3140	8.85	
	lb								*5930	*5930	*7890	6920	(29.0)	
4.5 m (15 ft)	kg						*4210	*4210	*3980	*3980	*3720	2770	9.37	
	lb						*9280	*9280	*8770	*8770	*8200	6110	(30.7)	
3.0 m (10 ft)	kg			*10720	*10720	*6550	*6550	*5090	*5090	*4410	3970	*3890	2600	9.59
	lb			*23630	*23630	*14440	*14440	*11220	11220	*9720	8750	*8580	5730	(31.5)
1.5 m (5 ft)	kg			*8900	*8900	*8350	*8350	*6020	5510	*4900	3820	*4080	2570	9.54
	lb			*19620	*19620	*18410	*18410	*13270	12150	*10800	8420	*8990	5670	(31.3)
Ground	kg			*10210	*10210	*9470	8490	*6730	5290	*5300	3710	*4290	2710	9.21
	lb			*22510	*22510	*20880	18720	*14840	11660	*11680	8180	*9460	5970	(30.2)
-1.5 m (-5 ft)	kg	*9470	*9470	*13480	*13480	*9820	8360	*7060	5190	*5440	3660	*4500	3060	8.56
	lb	*20880	*20880	*29720	*29720	*21650	18430	*15560	11440	*11990	8070	*9920	6750	(28.1)
-3.0 m (-10 ft)	kg	*12940	*12940	*14070	*14070	*9430	8410	*6830	5220			*4640	3860	7.50
	lb	*28530	*28530	*31020	*31020	*20790	18540	*15060	11510			*10230	8510	(24.6)
-4.5 m (-15 ft)	kg			*11670	*11670	*7990	7990							
	lb			*25730	*25730	*17610	17610							

Boom : 5.65 m (18' 6") / Arm : 2.92 m (9' 7") / Bucket : 0.80 m<sup>3</sup> (1.05 yd<sup>3</sup>) SAE heaped / 4 outrigger up with 3,400 kg (7,500 lb) counterweight.

Load point height m (ft)	Load radius										At max. reach			
	1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity		Reach	
													m (ft)	
9.0 m (30 ft)	kg											*3410	2840	6.52
	lb											*7520	6260	(21.4)
7.5 m (25 ft)	kg											*3470	1870	7.96
	lb											*7650	4120	(26.1)
6.0 m (20 ft)	kg								*2690	2010	2970	1420	8.85	
	lb								*5930	4430	6550	3130	(29.0)	
4.5 m (15 ft)	kg						*4210	2990	3880	1930	2610	1190	9.37	
	lb						*9280	6590	8550	4250	5750	2620	(30.7)	
3.0 m (10 ft)	kg			*10720	7970	*6550	4340	*5090	2730	3740	1810	2450	1070	9.59
	lb			*23630	17570	*14440	9570	*11220	6020	8250	3990	5400	2360	(31.5)
1.5 m (5 ft)	kg			*8900	6830	8180	3840	5160	2470	3590	1670	2420	1040	9.54
	lb			*19620	15060	18030	8470	11380	5450	7910	3680	5340	2290	(31.3)
Ground	kg			*10210	6570	7830	3550	4950	2290	3480	1570	2550	1100	9.21
	lb			*22510	14480	17260	7830	10910	5050	7670	3460	5620	2430	(30.2)
-1.5 m (-5 ft)	kg	*9470	*9470	*13480	6590	7710	3450	4850	2200	3440	1530	2880	1290	8.56
	lb	*20880	*20880	*29720	14530	17000	7610	10690	4850	7580	3370	6350	2840	(28.1)
-3.0 m (-10 ft)	kg	*12940	*12940	*14070	6740	7760	3790	4870	2220			3630	1700	7.50
	lb	*28530	*28530	*31020	14860	17110	7690	10740	4890			8000	3750	(24.6)
-4.5 m (-15 ft)	kg			*11670	7050	7980	3670							
	lb			*25730	15540	17590	8090							

- Lifting capacity is based on SAE J1097, ISO 10567.
- Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
- The load point is a hook located on the back of the bucket.
- (\*) indicates the load limited by hydraulic capacity.

# Lifting Capacity

## R210W-9

Rating over-front Rating over-side or 360 degree

Boom : 5.65 m (18' 6") / Arm : 2.92 m (9' 7") / Bucket : 0.80 m<sup>3</sup> (1.05 yd<sup>3</sup>) SAE heaped / Front outrigger and rear dozer blade down with 3,400 kg (7,500 lb) counterweight.

Load point height m (ft)	Load radius										At max. reach			
	1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity		Reach	
													m (ft)	
9.0 m (30 ft)	kg											*3410	*3410	6.52
	lb											*7520	*7520	(21.4)
7.5 m (25 ft)	kg											*3470	3210	7.96
	lb											*7650	7080	(26.1)
6.0 m (20 ft)	kg								*2690	*2690	*3580	2580	8.85	
	lb								*5930	*5930	*7890	5690	(29.0)	
4.5 m (15 ft)	kg						*4210	*4210	*3980	3380	*3720	2250	9.37	
	lb						*9280	*9280	*8770	7450	*8200	4960	(30.7)	
3.0 m (10 ft)	kg			*10720	*10720	*6550	*6550	*5090	4750	*4410	3250	*3890	2090	9.59
	lb			*23630	*23630	*14440	*14440	*11220	10470	*9720	7170	*8580	4610	(31.5)
1.5 m (5 ft)	kg			*8900	*8900	*8350	7040	*6020	4460	*4900	3100	*4080	2070	9.54
	lb			*19620	*19620	*18410	15520	*13270	9830	*10800	6830	*8990	4560	(31.3)
Ground	kg			*10210	*10210	*9470	6700	*6730	4260	*5300	2990	*4290	2180	9.21
	lb			*22510	*22510	*20880	14770	*14840	9390	*11680	6590	*9460	4810	(30.2)
-1.5 m (-5 ft)	kg	*9470	*9470	*13480	*13480	*9820	6590	*7060	4160	*5440	2950	*4500	2470	8.56
	lb	*20880	*20880	*29720	*29720	*21650	14530	*15560	9170	*11990	6500	*9920	5450	(28.1)
-3.0 m (-10 ft)	kg	*12940	*12940	*14070	14020	*9430	6640	*6830	4190			*4640	3130	7.50
	lb	*28530	*28530	*31020	30910	*20790	14640	*15060	9240			*10230	6900	(24.6)
-4.5 m (-15 ft)	kg			*11670	*11670	*7990	6850							
	lb			*25730	*25730	*17610	15100							

Boom : 5.65 m (18' 6") / Arm : 2.92 m (9' 7") / Bucket : 0.80 m<sup>3</sup> (1.05 yd<sup>3</sup>) SAE heaped / Front outrigger and rear dozer blade up with 3,400 kg (7,500 lb) counterweight.

Load point height m (ft)	Load radius										At max. reach			
	1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity		Reach	
													m (ft)	
9.0 m (30 ft)	kg											*3410	2840	6.52
	lb											*7520	6260	(21.4)
7.5 m (25 ft)	kg											*3470	1870	7.96
	lb											*7650	4120	(26.1)
6.0 m (20 ft)	kg								*2690	2010	2970	1420	8.85	
	lb								*5930	4430	6550	3130	(29.0)	
4.5 m (15 ft)	kg						*4210	2990	3880	1930	2610	1190	9.37	
	lb						*9280	6590	8550	4250	5750	2620	(30.7)	
3.0 m (10 ft)	kg			*10720	7970	*6550	4340	*5090	2730	3740	1810	2450	1070	9.59
	lb			*23630	17570	*14440	9570	*11220	6020	8250	3990	5400	2360	(31.5)
1.5 m (5 ft)	kg			*8900	6830	8180	3840	5160	2470	3590	1670	2420	1040	9.54
	lb			*19620	15060	18030	8470	11380	5450	7910	3680	5340	2290	(31.3)
Ground	kg			*10210	6570	7830	3550	4950	2290	3480	1570	2550	1100	9.21
	lb			*22510	14480	17260	7830	10910	5050	7670	3460	5620	2430	(30.2)
-1.5 m (-5 ft)	kg	*9470	*9470	*13480	6590	7710	3450	4850	2200	3440	1530	2880	1290	8.56
	lb	*20880	*20880	*29720	14530	17000	7610	10690	4850	7580	3370	6350	2840	(28.1)
-3.0 m (-10 ft)	kg	*12940	*12940	*14070	6740	7760	3790	4870	2220			3630	1700	7.50
	lb	*28530	*28530	*31020	14860	17110	7690	10						