

RECYCLER & STABILISER

Tank & TwinTank



MFT 2-8T | MFT 3-19TT

<http://amag.de>



MFT TwinTank

HIGHLIGHTS



- **Flexible modular design / quick-change superstructure**
- **Power take-off shaft with full engine power 480 PS**
- **Hydrostatic, infinitely variable propulsion 0-12 km/h**



- **Load-Sensing-Hydraulic 220l/min**
- **Rear hydraulics CAT 3 / CAT 4**
- **Front hydraulics CAT 2**
- **Standard transport <4m height**
- **TwinTank Water / Polymer / Bitumen**



Technical data	MFT 2-8T	MFT 3-19TT
Tank	7500 l	8000 l / 10000 l ¹
High power water pump	1800 l/min	2x 1800 l/min
Eccentric worm-drive pump ²	800 l/min	2x 800 l/min
Vehicle		MAN TGS - All Wheel Drive
Engine	D26	
Cylinders	6	
Displacement	12.5 l	
Power	480 PS	
Torque	2300 Nm	
Power take-off (PTO)	Full engine power 480 PS	
Vehicle speed	Hydrostatic, infinitely variable 0 — 12 km/h	
Fuel	400l Diesel / 35l AdBlue	
Unladen weight	12.5 t	20 t
Total permissible weight	24 t	41 t
Tyres — front axle	19,5 LR24	
Tyres — rear axle(s)	800-40-26,5	
Electrical system	24V	
Dimensions L x W x H	7.070 x 2.530 x 3.380 m	8.257 x 2.530 x 3.380 m

¹ Choose between water / polymer additive / bitumen

² Optional for viscous fluids

Performance	Soil stabilising ¹		Recycling ²
Working depth cm	25	40	25
Output m ² /Day	12.000 — 14.000	8.000 — 13.000	7.000 — 9.000

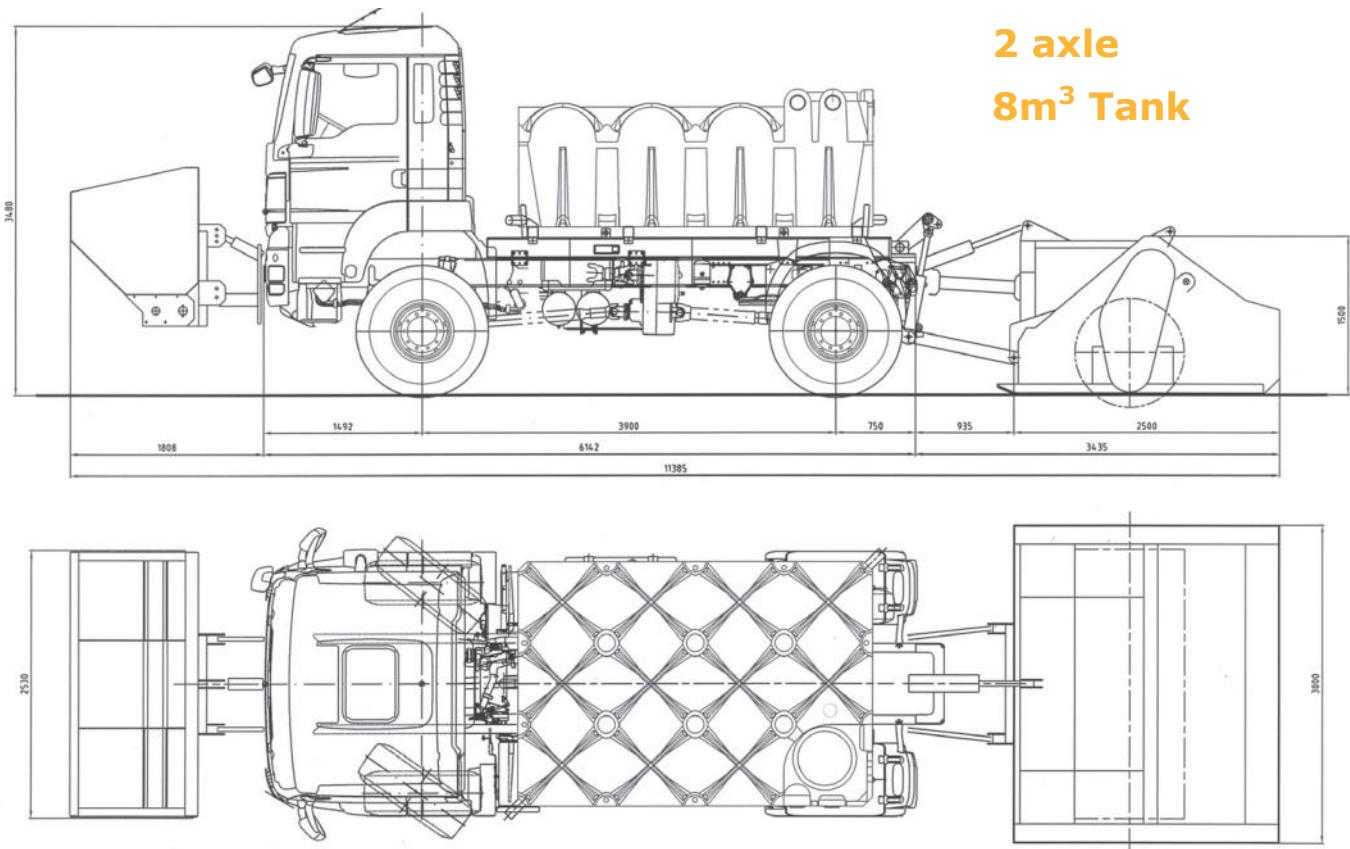
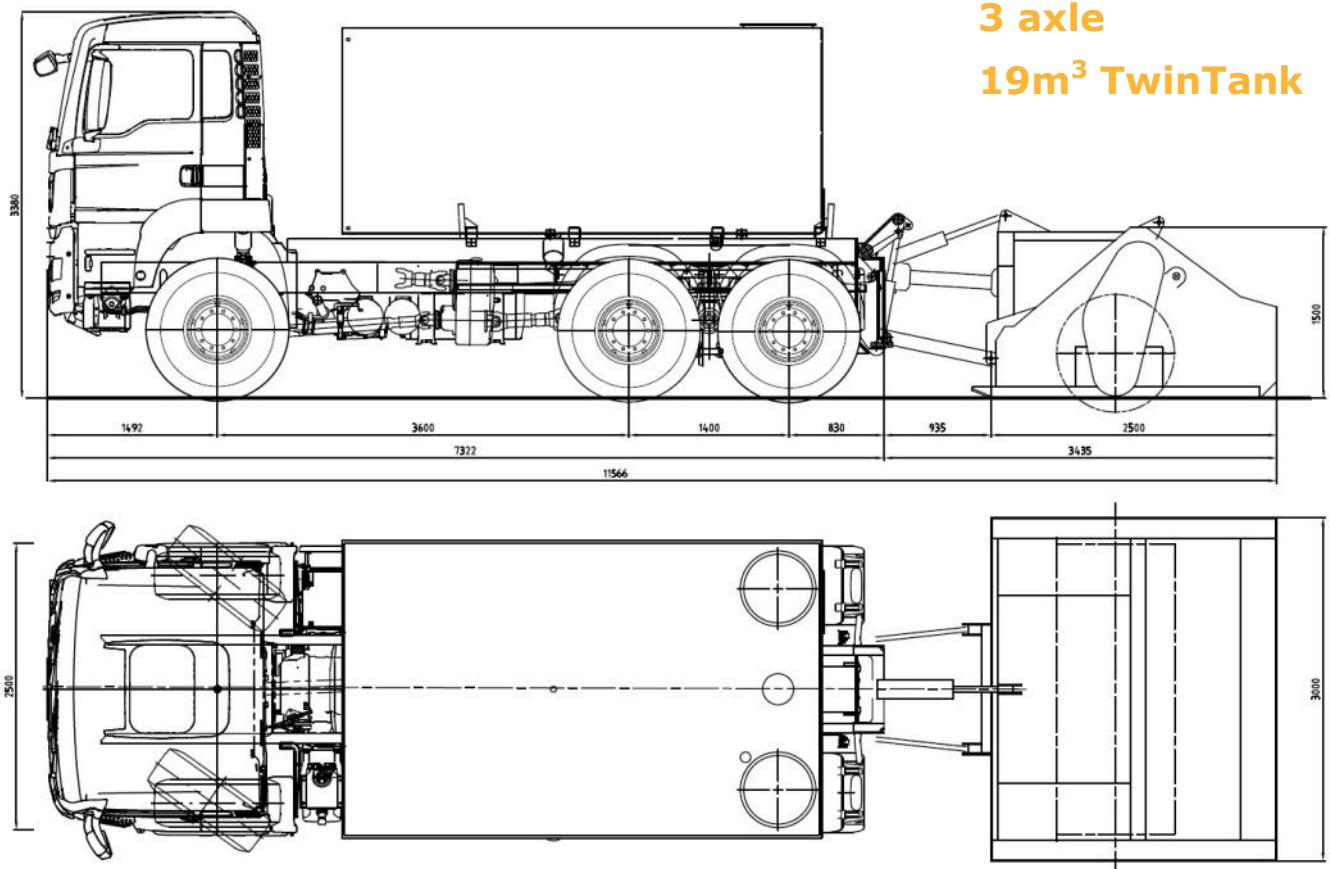
All figures are based on experience and can vary dependant on soil, recycler and site requirements

¹ Cement / chalk in sandy and gravelly soil

² Bituminous ground milling depth maximum 10cm

Equipment	MFT 2-8T	MFT 3-19TT
Control terminal	<input checked="" type="checkbox"/>	
High power pump for emulsion / bitumen	<input type="checkbox"/>	
Suction pump for filling	<input type="checkbox"/>	
Tool storage	<input checked="" type="checkbox"/>	
Lighting package with 4 LED headlights	<input checked="" type="checkbox"/>	
Ladder / access hatch	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Rear hydraulics CAT3 / CAT4	<input checked="" type="checkbox"/>	
Front hydraulics CAT2	<input type="checkbox"/>	
Trailer coupling	<input type="checkbox"/>	
Modular quick-change superstructure	<input type="checkbox"/>	
Injection dosing infinitely variable	<input checked="" type="checkbox"/>	
All-wheel-drive chassis, lockable differential	<input checked="" type="checkbox"/>	
Road legal 0 — 80 km/h	<input type="checkbox"/>	
Paintwork	RAL 9001 cremeweiss	
Custom paintwork	<input type="checkbox"/>	
Alternative tyres	<input type="checkbox"/>	

■ Standard □ Optional

MFT-2-8T**DIMENSIONS****MFT-3-19TT**

Innovating since 1957



amag GmbH

Hauptstrasse 100
56745 Bell
Germany

+49-2652-93936-0
info@amag.de
<http://amag.de>



amag-Bell



amagBell



amag_gmbh